

Banshee Head Options

Up to 20k psi for tubes as small as 5/8"



All **BANSHEES** are available with either pipe thread connections, left hand & right hand Medium Pressure threads, and BSPP as noted in the chart.




BN13 042
BN18 042

Polisher Heads

Designed to remove thin hard scale. Ideal for IRIS inspections.

- 2 jets @ 85°
- 2 jets @ 105°

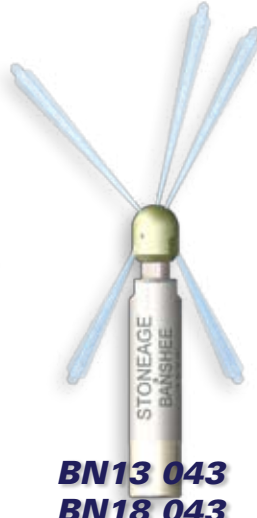

BN13 043
BN18 043

Unplugging Heads

This jetting option is designed for the toughest plugged tubes.

- 1 jet @ 15°, 30°, 45°
- 2 jets @ 135°



BN18 044
BN24 044

Universal Head

Designed to unplug and polish at the same time.

- 1 jet @ 20°, 30°, 60°
- 2 jets @ 90°, 140°

BN 13 & 18 Flows		
Pressure	BN13	BN18
10k-15k psi 700-1k bar	7-9 gpm 27-34 lpm	8-10 gpm 30-40 lpm
		11-14 gpm 40-50 lpm
15k-20k psi 1k-1400 bar	7-9 gpm 27-34 lpm	8-10 gpm 30-38 lpm
		11-14 gpm 42-53 lpm

BN 24 Universal Head Options		
Pressure	Part Number	Flow Range
10k-15k psi 700-1k bar	BN24 044-A	19-24 gpm 70-90 lpm
	BN24 044-B	14-18 gpm 50-70 lpm
	BN24 044-C	11-13 gpm 40-50 lpm
15k-20k psi 1k-1400 bar	BN24 044-D	17-20 gpm 60-75 lpm
	BN24 044-E	14-16 gpm 50-60 lpm
	BN24 044-F	11-13 gpm 40-50 lpm

Banshee Specifications						
Model	BN13		BN18		BN24	
For Tubes I.D.	5/8"-1"	16-25 mm	7/8"-1.25"	22-38 mm	1.1"-2.0"	29-51 mm
Max. Pressure	20k psi	1400 bar	20k psi	1400 bar	20k psi	1400 bar
Flow Rating	0.27 Cv		0.66 Cv		0.9 Cv	
Inlet Port	1/8 npt, 3/8"-24 LH, RH, or BSPP		1/4 npt, 9/16"-18 LH, RH, or BSPP		3/8 npt, 9/16"-18 LH, RH or BSPP	
Body Diameter	0.5 in.	12.7 mm	0.69 in.	17.6 mm	0.93 in.	24 mm
Length Overall	2.9 in.	73.7 mm	3.8 in.	96.5 mm	5.12 in.	130 mm

TUBE CLEANING