


Control Boxes

STEP 4

Control Box

Choose the remote operating controls for manual or air powered positioning system.

The **Control Box** operates the lancing system and positioner air motors. It is simple to set up, operate and move about. An air filter and lubricator are included for air motor maintenance. 25 ft 1/2" air hoses are supplied with each control box.

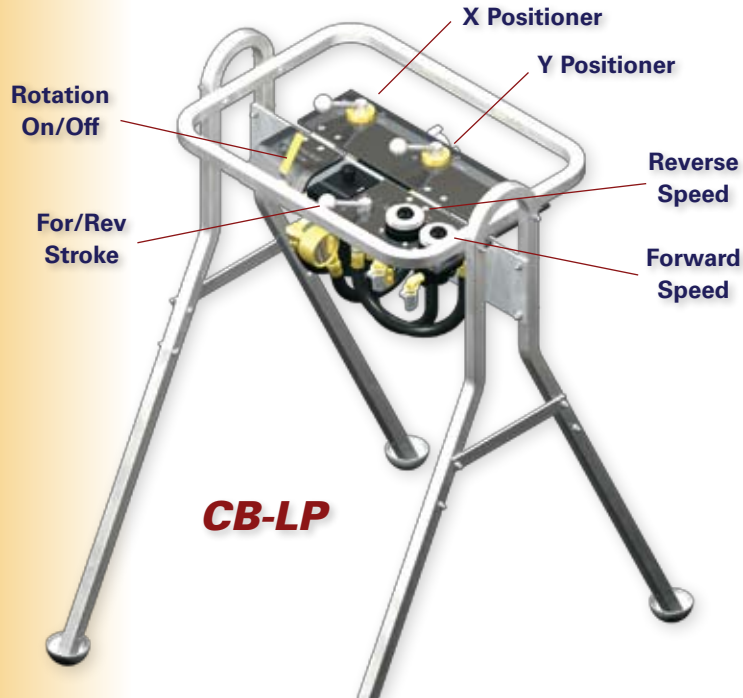

CB-LP Specs

MODEL	CB-LP
Rotation	On/Off
Stroke	Forward/Back
Stroke Speed	Regulated
Forward fps	Regulated
Back fps	Regulated
X Motion (L/R)	Left/Right
Y Motion (U/D)	Up/Down
Air Hoses Incl.	7
Ship Weight	60 lbs 27 kg

RIGID LANCES

Rigid Lances

Dependable High Quality Lances

Please Specify Length When Ordering

Maximum Length 10 ft. (3 meters)

All Lances are 304 SS 1/8 Hard

STEP 5

Lances & Tips

We can help you calculate the correct lance to match your pump specs and operation.

Lance Selection Guide

OD Tubing	StoneAge Part #	Pressure Rating	Thread Connection	OD	ID
9/16 in.	SA 567-P4P4	15k psi	1/4 npt	.563 in.	.312 in.
3/8 in.	SA 537-M6M6R	20k psi	3/8 MP LH/RH	.375 in.	.203 in.
9/16 in.	SA 567-M9M9R	20k psi	9/16 MP LH/RH	.563 in.	.312 in.
3/8 in.	SA 539-H6H6R	40k psi	3/8 HP LH/RH	.375 in.	.125 in.
9/16 in.	SA 569-H9H9	40k psi	9/16 HP LH/RH	.563 in.	.188 in.

npt = National Pipe Thread

MP = Cone & Thread Connection

HP = Cone & Thread Connection

www.stoneagetools.com • www.sewernozzles.com

1-866-795-1586 (Toll Free in the U.S) or 970-259-2869 • Fax: 970-259-2868

email: sales@stoneagetools.com

