

New Torus® - One 3-D Tank Cleaning

**The New 3-D Torus®
One Simple Tool
to Handle All Your
Tank Cleaning Needs**

NEW


**Simplicity.
Efficiency.
Productivity.**

The **Torus®** is designed to meet the most amount of tank cleaning challenges possible. It can handle pressures from 5k - 22k psi by simply changing the manifold and inlet coupling. There are three manifolds capable of handling flows from 17 - 80 gpm and can be easily interchanged. There are four different inlet couplings available to adapt to your hose.



- Comes with 2 Sets of Arms, 2" and 8." Longer extensions are available.

- 5k-22k psi
- Simple to Maintain
- Change Manifold and Coupling to Meet Different psi Ratings
- Magnetic Speed Control

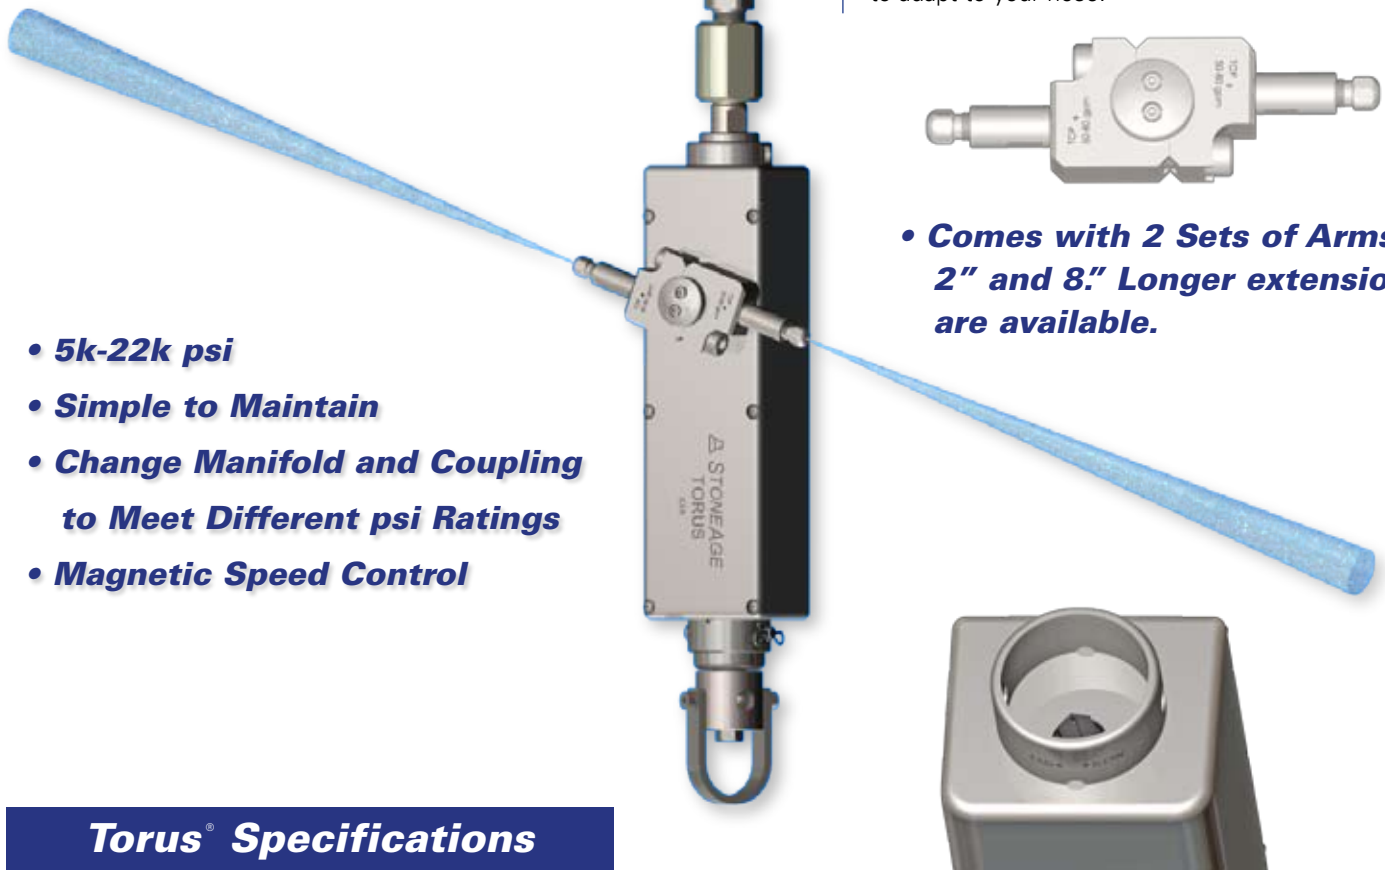

Torus® Specifications

Pressure	5k - 22k psi	350-1500 bar
Flow Capacity	17-80 gpm	64-303 lpm
Flow Rating	2.11 Cv	
Power	50-950 hp	37-708 kW
Cycle Time	4-24 minutes	
Inlet Options	3/4" or 1" npt or 3/4" or 1" MP	
Diameter	5.62 in.	143 mm
Weight	35 lbs	15.9 kg

Magnetic Speed Control

The **Torus®** offers long lasting and durable magnetic speed control. While operating the Torus an operator can easily adjust the magnetic rotation speed to adapt to different applications. The operator simply adjusts this dial to decrease the speed for difficult applications and increase the speed for the easier applications. If the arms hit an obstruction the tool simply stops rotating and there are no broken gears to address.