



15k-40k Automated Tractors

The Blastrack™

Performance Meets Versatility

The **Blastrack™** offers mechanized, controlled linear motion, and features independent speed and rotation controls. It is designed to work with any of our rotating assemblies shown on pages 8, 9 and 10.

Moveable stops define the travel distance and engage the auto reverse. The box rail track can be spliced to any length. With a variety of different swivels and rotary power options, the **Blastrack™** can be adapted to almost any application.

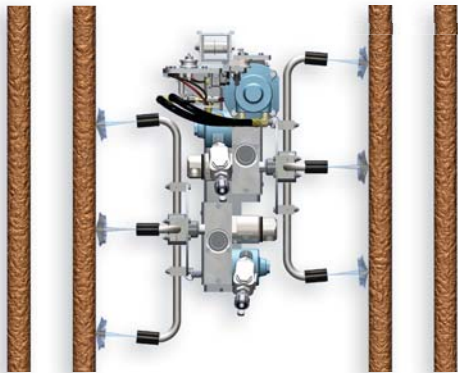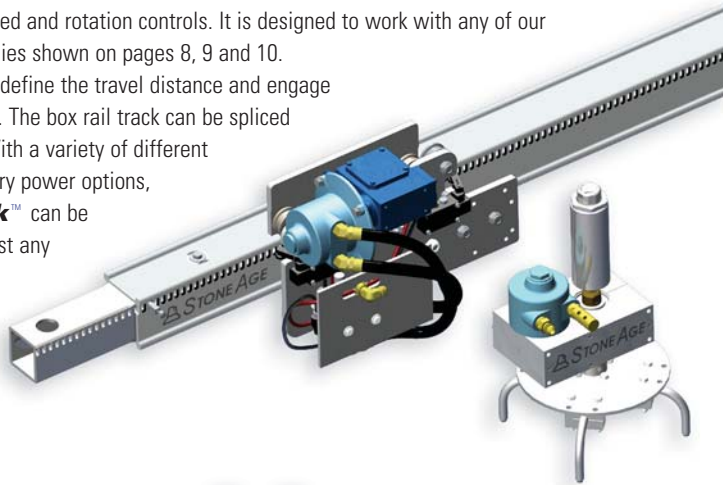

The **Blastrack™** can be outfitted with 2 rotating jet heads in opposing directions for slot cleaning in between two surfaces, as shown at left.



The **Blastrack™** can clean grates and surfaces, both horizontal and vertical, with ease. The example above shows two **SG-40's** operating in tandem along one rail to clean a conveyor.

Blastrack™ Specs

Blastrack™	BUD-100™
Max. Pressure	15k - 40k psi
	1000 - 2800 bar
Max. Flow	110 gpm 420 lpm
Rotation	Up to 1000 rpm
Linear Speed	7-40 ft/min

Circular Track

The powerful **Blastrack™** can now handle round surfaces like pilings and pipes. These tracks are custom made to match your application so availability can fluctuate.



Tool Talk™

Remember to Use Filtration Units!

The quality of the air provided to any of our pneumatic tools greatly affects performance. That's why we recommend the **FO-200™ Air Pretreat System**, which filters out air, removes water and provides lubrication for the air motors.



SURFACE PREP