


# Lancing Power Packages

## Single, Dual and Triple Lance Options

### STEP 2

#### Power Package


Choose a 15k, 20k or 40k psi power package with either single, dual or triple lance capability.

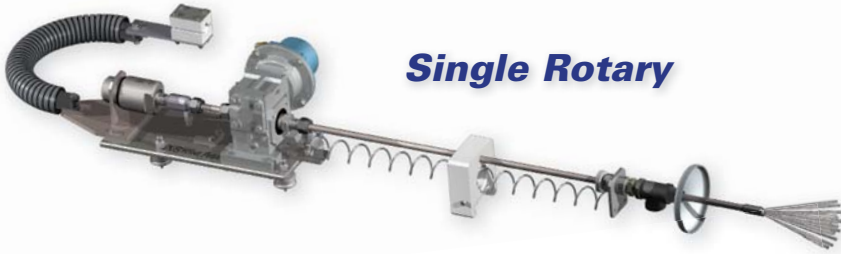

**Single Rotary**

#### 15k, 20k & 40k psi


The single rotary package features 80 rpm-500 rpm rotation and requires compressed air pressure of 80-100 psi, 80-130 cfm. A hydraulic option is also available.

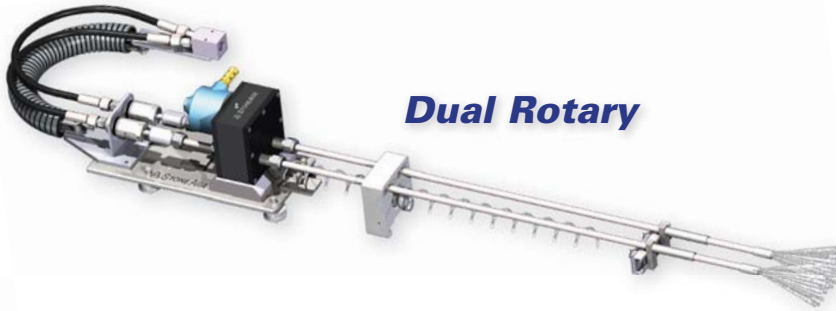

**Dual Rotary**

#### 15k, 20k & 40k psi

The dual rotary package features high speed rotation, from 120 rpm-600 rpm rotation and requires compressed air pressure of 80-100 psi, 80-130 cfm. We redesigned the rotary gearbox for more torque and increased durability. A hydraulic option is also available.

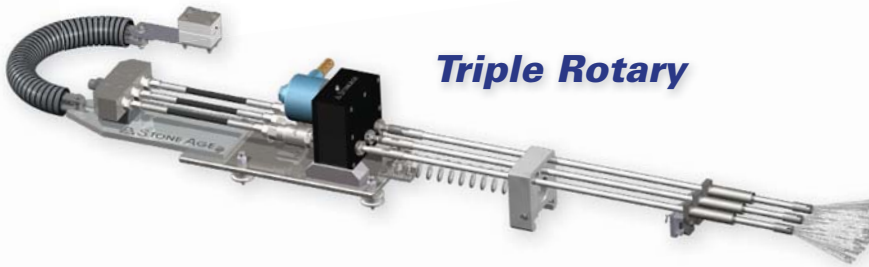

**Triple Rotary**

#### 15k, 20k & 40k psi

The triple lance rotary system requires 80-100 psi, 80-130 cfm. This model also has a redesigned rotary gearbox for more torque and increased durability. A hydraulic option is also available.

LANCING SYSTEMS

## Lancing Power Package Specifications

Package Pressure	15k psi 1000 bar	20k psi 1400 bar	40k psi 2800 bar
<b>Single Rotary Package</b>	<b>BRLM™ 310-15</b>	<b>BRLM™ 320-15</b>	<b>BRLM™ 330-15</b>
Hose Connection	1/2 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP
<b>Dual Rotary Package</b>	<b>BRLM™ 341-15</b>	<b>BRLM™ 351-15</b>	<b>BRLM™ 361-15</b>
Hose Connection	3/4 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP
<b>Triple Rotary Package</b>	<b>BRLM™ 343-15</b>	<b>BRLM™ 353-15</b>	<b>BRLM™ 363-15</b>
Hose Connection	3/4 npt	3/4 MP	9/16 HP
Lance Connection	1/8, 1/4 npt	3/8, 9/16 MP	3/8, 9/16 HP