


HCS-3L

Hose Containment System for AutoBox ABX-3L & ABX-2L

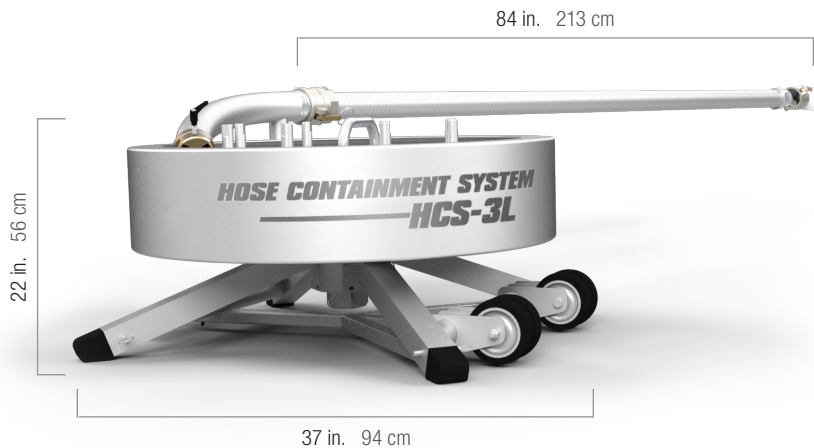

OVERVIEW

The HCS-3L hose containment system contains and securely stores up to three hoses typically used for heat exchanger tube cleaning.

The HCS-3L is simple to setup and operate, and greatly increases job site safety by eliminating the potential for high pressure hoses to snag on structure, valves, or other objects. It also increases hose life by reducing wear and makes it easy to store and transport hoses between jobs.

FEATURES	BENEFITS
<ul style="list-style-type: none"> Reliable hose containment and storage 	<ul style="list-style-type: none"> Increased safety on job site
<ul style="list-style-type: none"> Portable design with small footprint 	<ul style="list-style-type: none"> Easy to store and transport hoses between jobs Reduced hose wear
<ul style="list-style-type: none"> Aluminum and SS construction 	<ul style="list-style-type: none"> Easy to transport and set up, even in tight spaces
<ul style="list-style-type: none"> Triple, dual, or single lance operation 	<ul style="list-style-type: none"> Durability and corrosion resistance
<ul style="list-style-type: none"> Backwards compatible with ABX-2L 	<ul style="list-style-type: none"> Easily adapt to specific application requirements Interchangeable equipment protects investment

SPECIFICATIONS

PART ID	HCS-2L-TM16, HCS-3L-TM16	HCS-2L-M24, HCS-3L-M24
Maximum Pressure	22k psi 1500 bar	22k psi 1500 bar
Hose Size	3/4, 4/4-8/4	3/4, 4/4-8/4
Storage Capacity*	75 ft 23 m	75 ft 23 m
Max. Hose Bend Radius	8 in. 203 mm	8 in. 203 mm
Swivel Inlet	1.00 Type M to MP12	MP12 to M24C
Hose Connections	.56 to Type M, .75 to Type M	MP6 to BSPP4C
Dimensions	37 x 22 in. 94 x 56 cm	37 x 22 in. 94 x 38 cm
Snout Length	84 in. 213 cm	84 in. 213 cm
Snout and Cam Size	2 in. 51 mm	2 in. 51 mm
Weight**	64 lb 29 kg	64 lb 29 kg

*Based on 3 x 8/4 hoses **Not including hoses