

40k psi Powered Cleaners

The Deck Blaster™

8-Jet Bar Head

The Bar Head manifold allows up to eight **OS6 Sapphire** nozzles to be used at a time. Maximum jet path is 14".

Convenient Controls

Handle operates pressure and rotation, pushbutton engages drive.

Rotation Control

The rotation speed is independently controlled and is adjustable via a valve. It operates at 250 rpm-1,000 rpm.

Self Propelled Drive

The **Deck Blaster™** uses air-powered speed adjustments to maximize efficiency and decrease cleaning time.

Vacuum Recovery

A 3" vacuum attachment can pivot to either side for easy clean up.

Height Adjustment


A simple adjustment allows the height to be changed quickly and easily.



SURFACE PREP

"Automotive Paint" Grate Cleaner

We are proud to introduce our newest Deck Blaster™, a proven design for auto plant grates, called the FCT-UH™. This unit is specifically designed for cleaning auto plant paint grates. We have removed the vacuum, sized the dome to fit the manway access and designed a 6-arm manifold for adjustable jet angles, all on a very maneuverable 3-wheel chassis.

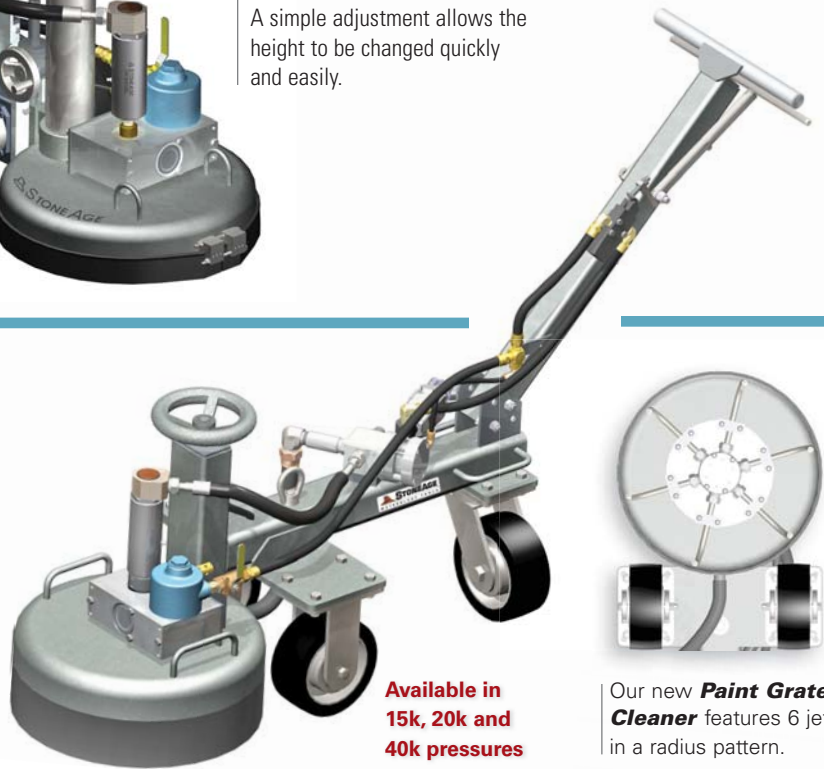

Available in 15k, 20k and 40k pressures



Our new **Paint Grate Cleaner** features 6 jets in a radius pattern.

Deck Blaster™ and Grate Cleaner Specifications

| MODEL | MAX. PRESS. | MAX. FLOW | JET PATH | SPEED RANGE | WEIGHT | NOZZLE |
|------------------|-------------|-----------|----------|----------------|---------|------------|
| DB™ * | 40k psi | 6 gpm | 14 in. | 3 - 20 ft/min | 215 lbs | OS6 |
| | 2800 bar | 20 lpm | 350 mm | .9 - 6.0 m/min | 116 kg | OS6 |
| FCT-UH™ * | 40k psi | 10 gpm | 17.5 in. | N/A | 290 lbs | OS6 |
| | 2800 bar | 38 lpm | 444 mm | N/A | 131 kg | OS6 |

* We offer both of these units with your choice of either a Jetstream (JS) or Gardner Denver (GD) dump valve.